



### Key Feature

- Modular door station Touch & Display module, needs mounting bracket
- 4 inch touch screen, IP65, IK8
- Dial number display, pin code & card unlock, contact list & advertisement display
- Stores and searches contact list
- Multiple languages

### Specification


| System parameters          |                  |
|----------------------------|------------------|
| Operating system           | Linux            |
| ROM                        | 32 MB            |
| RAM                        | 128 MB           |
| Display parameters         |                  |
| Screen size                | 4-inch           |
| Type                       | IPS touch screen |
| Resolution                 | 480 x 480        |
| Audio parameters           |                  |
| Audio compression standard | /                |
| Audio input                | /                |
| Audio output               | Buzzer           |
| Audio quality              | /                |
| Volume adjustment          | /                |
| Power output               | /                |
| Network parameters         |                  |
| Wireless network           | Only AP mode     |

| Authentication         |                                                                                                                                                                                        |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Card reading frequency | 13.56 MHz                                                                                                                                                                              |
| Card reading distance  | 2 cm                                                                                                                                                                                   |
| Card type              | Mifare card                                                                                                                                                                            |
| Device interfaces      |                                                                                                                                                                                        |
| TF card                | Reserved                                                                                                                                                                               |
| DIP switch             | 8 bits                                                                                                                                                                                 |
| Cascade interface      | 2                                                                                                                                                                                      |
| General                |                                                                                                                                                                                        |
| Installation           | Surface, flush                                                                                                                                                                         |
| Protective level       | IP65, IK8                                                                                                                                                                              |
| Working temperature    | -20 ° C to 60 ° C (-4 ° F to 140 ° F)                                                                                                                                                  |
| Working humidity       | 10% to 95% (no-condensing)                                                                                                                                                             |
| Dimensions             | 100 mm × 100 mm × 35 mm (3.94" × 3.94" × 1.38")                                                                                                                                        |
| Power supply           | 12 VDC, supplied by the main module                                                                                                                                                    |
| Power consumption      | ≤ 10 W                                                                                                                                                                                 |
| Language               | English, French, Portuguese, Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek |

## Available Model

DS-KD-TDM

## Dimension

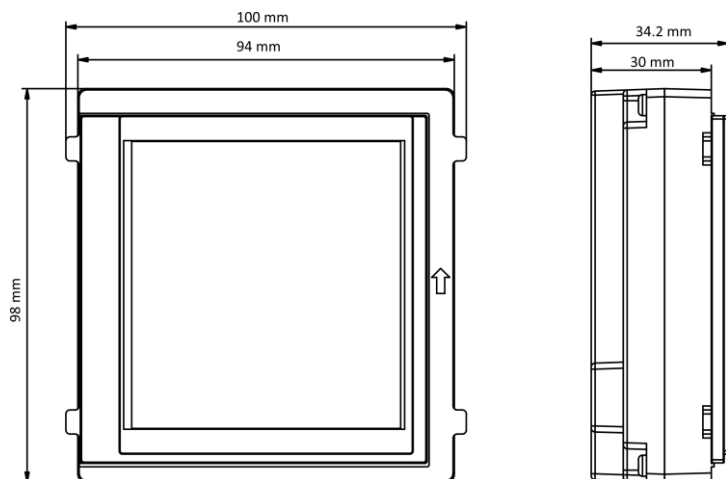

#### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.

