

AK5048

PC1174

CABLE REQUIREMENTS:

Colour: BLACK
Type: 3 Core 1.50mm² H05VV-F (European Approved)
Conductor Colour Codes:
 Earth (Green & Yellow) 
 Neutral (Blue) 
 Live (Brown) 





Complete Powerlead Rated: 16A/250V

PLUG / END A REQUIREMENTS:

Type: F/E
Colour: N/A
Rating: N/A
Reference: See Termination Details Below

CONNECTOR / END B REQUIREMENTS:

Type: SW920
Colour: BLACK
Rating: 16A
Reference: C19 IEC Lock Connector (European Approved)

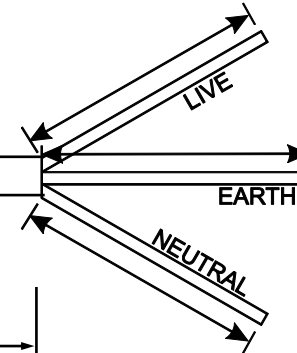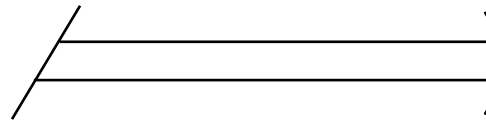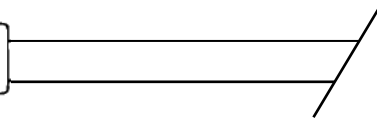

Free End Strip Lengths (Includes Terminations)

Live = 40mm (+/- 2mm)
 Earth = 40mm (+/- 2mm)
 Neutral = 40mm (+/- 2mm)

1877mm (+/-20mm)

2000mm (+/-20mm)

EXTRA REQUIREMENTS:

PACKAGING OUTERTBC
PIN PROTECTING COVERNO
WIRING INSTRUCTIONSNO
PRE-SHIPMENT INSPECTION REQUIRED....NO
COMMENTS:

CHANGE MANAGEMENT:
HANKING

Loose

TERMINATIONS / FURTHER COMMENTS:
LIVE / BROWN

Type: Slug left on
Size: 6mm (+/-1mm)

NEUTRAL / BLUE

Type: Slug left on
Size: 6mm (+/-1mm)

EARTH / GREEN & YELL

Type: Slug left on
Size: 6mm (+/-1mm)